




REMOVE THE ENGOBE ON THE BACK OF THE TILE

MAIN FEATURES

- Remove the engobe from the back tiles, after the kiln:
 - * Prevents material transfer in tile stacking processes.
 - * Prevents dirt in work areas after the kiln.
 - * 100% setting adhesive, in the installation work.
 - * Greatly reduces maintenance from loading and sorting areas.
 - * Ecological, your tiles do not give off residue when leaving the factory.
- Automatic brush pressure, which guarantees a constant and repetitive process.
- Different types of brush, depending on your needs.
- Minimum maintenance.
- The recovered engobe can be reused.



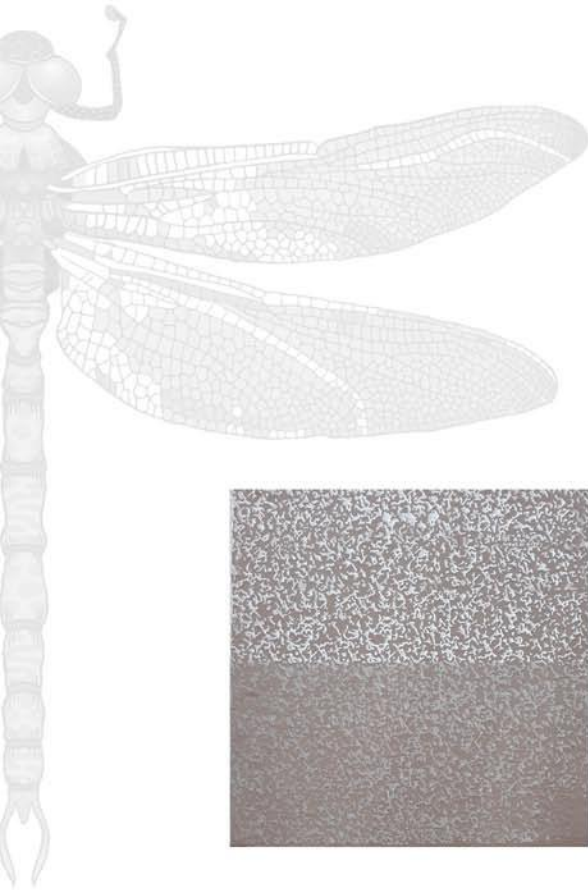

Eliminates engobe problems after kiln

TECHNICAL SPECIFICATIONS									
Model	Voltage	Power	Weight	Hight	Width	Lenght	Maximum work area	Minimum work area	Compressed air
Machine body static	--	--	875 Kilograms 1,929 lb.	1,872 millimeters 73.7"	1,084 millimeters 42.67"	2,262 millimeters 89"	1,630 millimeters 64.17"	200 millimeters 7.87"	100 liters minute 4 bar pressure 400 kPa
Machine body dinamic	--	--	925 Kilograms 2,039 lb.	1,872 millimeters 73.7"	1,084 millimeters 42.67"	2,890 millimeters 89"	1,630 millimeters 64.17"	200 millimeters 7.87"	100 liters minute 4 bar pressure 400 kPa
Console	400V AC 50-60 Hertz	4 Kilowatt 40A	105 Kilograms 231,48 lb.	2,072 millimeters 81,57"	596 millimeters 23,46"	668 millimeters 26,29"	--	--	NO



ROLLERS	
Diameter	Lenght
200 millimeters 7,87"	850 millimeters 33,46"
200 millimeters 7,87"	1.020 millimeters 40,15"
200 millimeters 7,87"	1.250 millimeters 49,21"
200 millimeters 7,87"	1.560 millimeters 61,41"

People & Technology

Alfred Nobel, 4
12200 Onda (Castellón-SPAIN)
info@personasytecnologia.com
www.personasytecnologia.com
+34 964 77 21 36